



Features:

- Single Setpoint
- On delay / Interval modes
- Output 2 C/O
- Time range 0.01 to 99.9 hours
- Reset Input
- Down counting

Size: 72mm x 72mm, 96mm x 96mm

Technical Specifications

Input Specifications

Display	7 segment LED; Height: 0.5"
Digits	3 digits
Start Input	Pulse start
Accuracy	±0.05% of F.S. or 50 ms

Output Specifications

Output Contact	2 C/O (DPDT)
Contact Rating	5A @ 230V AC

Functional Specifications

Modes	ON delay / Interval delay
Time Ranges	0 - 9.99 sec 0 - 99.9 sec 0 - 999 sec 0 - 99.9 min 0 - 999 min 0 - 99.9 hr
Counting Direction	Down
Setpoints	1
Time Setting	Pushwheel
Reset	Front, Remote, Power interruption
LED Indications	Relay status


Supply Voltage

Supply Voltage	85 to 270V AC (50 / 60Hz)
----------------	---------------------------

Environmental Specifications


Temperature	Operating: 0 to 50°C Storage: -5 to 50°C
Humidity (non-condensing)	95% RH
Weight	XT264 - 200 gms XT364 - 330 gms

Dimensions

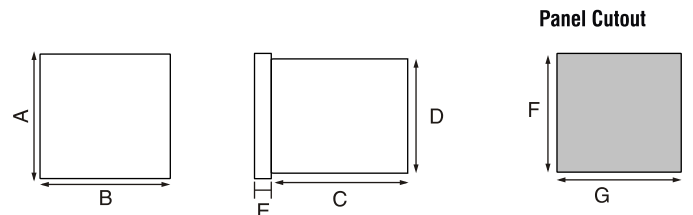

Models	DIM	A	B	C	D	E	F	G
XT264		72	72	115	68	10	69	69
XT364		96	96	70	90	10	92	92

Terminal Connections

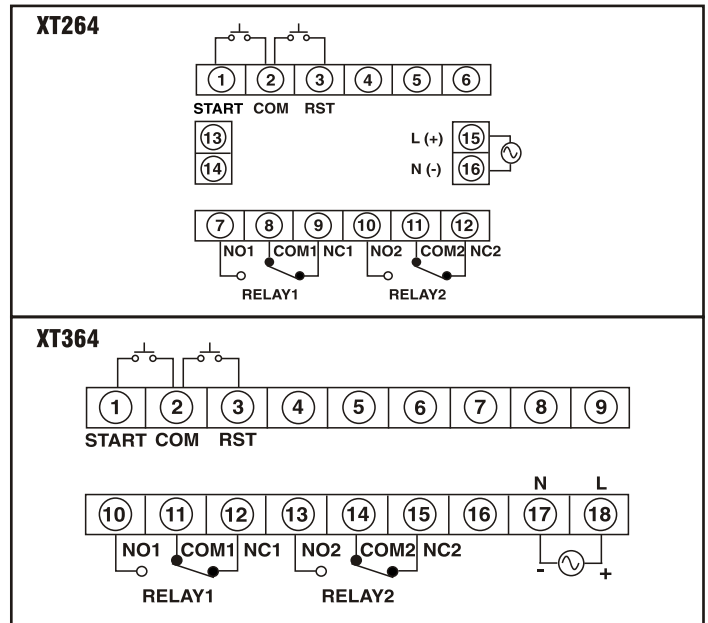

Ordering Information

Part No.	Supply Voltage
XT264	85 to 270V AC/DC
XT364	85 to 270V AC/DC

TIMING DIAGRAMS

