


LED High Bay Light




BL-IL515-100W

Dimension: Ø615x520(H) mm
Beam Angle: 120 Degree

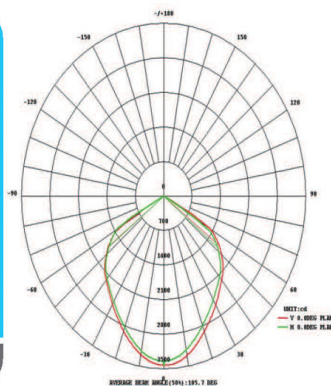

Distribution curve

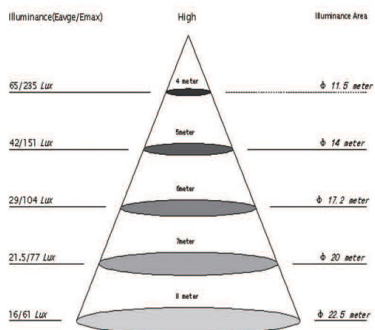


AAI curve




BL-IL-515-200W

Dimension: Ø615x 450(H) mm
Beam Angle: 120 Degree

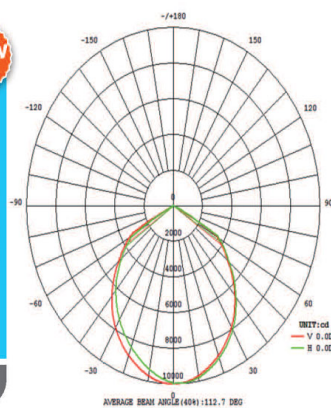

Distribution curve

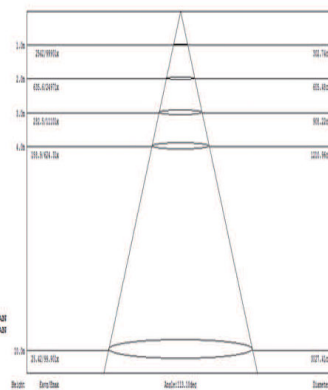

AAI curve

| Item Number | BL-IL-515-100W | BL-IL-515-200W |
|--------------------------|-------------------------|---------------------------|
| Operate Voltage Range | 85~285V ac/ 50~60Hz | 85~285V ac/ 50~60Hz |
| Power Consumption | 100W | 200W |
| Lumen Output | WW: 6,800lm CW: 7,200lm | WW: 13,300lm CW: 18,000lm |
| Weight | 20.0kg | 22.0kg |
| LED Chip | Bridgelux/ 1×100pcs | Bridgelux/ 1×200pcs |
| Power Factor | >0.95 | >0.97 |
| LED Junction Temperature | 60°C | 60°C |
| Operate Temperature | -40°C ~ +55°C | -40°C ~ +55°C |

General Specs: CCT: 2,700~7,000K, CRI: Ra>80, PF:>0.9, IP65 Rated, Warranty: 18 months